


Modul: 1 / 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6

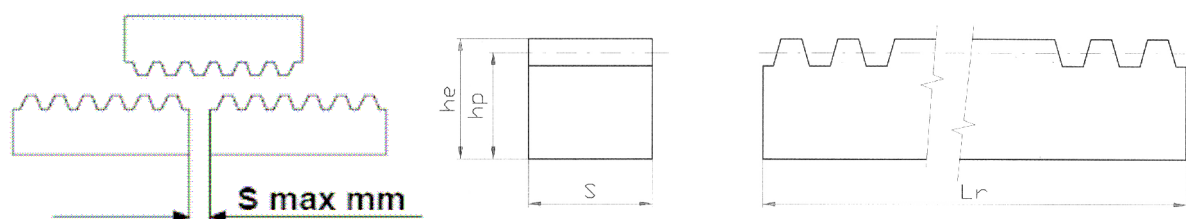

modul {typ}	hp mm	he x S mm	S mm	počet zubů				délka v mm (Lr)				hmotnost v kg			
				500	1000	2000	3000	500	1000	2000	3000	500	1000	2000	3000
1	14	15x15	0,5	159	318	636	955	449,51	999,02	1998,05	3000,22	0,820	1,500	3,100	4,900
1,5	15,5	17x17	0,6	106	212	424	637	449,51	999,02	1998,05	3001,79	1,000	2,000	4,000	6,100
2	18	20x20	0,6	80	159	318	478	502,65	999,02	1998,05	3003,36	1,400	2,700	5,400	8,400
2,5	22,5	25x25	0,7	64	127	255	382	502,65	997,45	2002,77	3000,22	2,100	4,300	8,600	11,900
3	27	30x30	0,8	53	106	212	319	499,51	999,02	1998,05	3006,51	3,100	6,300	12,500	18,600
	21	25x25										1,800	3,650	7,300	10,900
	26	30x30	0,8	40	80	159	239	502,65	1005,31	1998,05	3003,36	3,050	6,000	11,900	18,100
4	36	40x40										5,500	11,100	22,000	31,300
	45	50x50	1,0	32	64	128	191	502,65	1005,31	2010,31	3000,22	8,300	17,500	34,600	45,300
6	54	60x60	1,0	27	53	106	...	508,93	999,02	1998,05	...	12,650	25,000	51,000	...

Technická specifikace:

Tolerance na jedné rozteči +/-20um

Tolerance na všech roztečích +/-30um na 500mm

Přímé ozubení

Úhel záběru 20 °

Materiál C40